




- Four breaching tools in one: sledge, ram, break'n rake and pry bar.
- Apply the necessary tactic without changing tools.
- Offers the ability to shatter all types of windows, including laminated and security glass.
- The saw function can clear away all glass fragments for a safe entry through a window.
- Sling attachment points for easy carry and quick application.
- Made of high-strength, lightweight hydraulic pipe steel.
- Full Hardened Steel
 - Head: 50-HRC
 - Pry bar: 51-HRC
 - Brake'N Rake: 60-HRC
- Powder coated surface.
- Clear painted head.
- Rust protected paint.
- Grip-friendly structure for optimal grip.

Product information	
Prod Nr	MOE-008
Prod Name	S3 MultiSledge
HS code	8205598000
Nato stock nr	
Mateial	Steel
Color	Black

Product dimension	
Length	700 mm (27")
Weight	3.4 kg
Package dimension	
Length	185 mm
Width	70 mm
Height	520 mm
Weight	3.5 kg

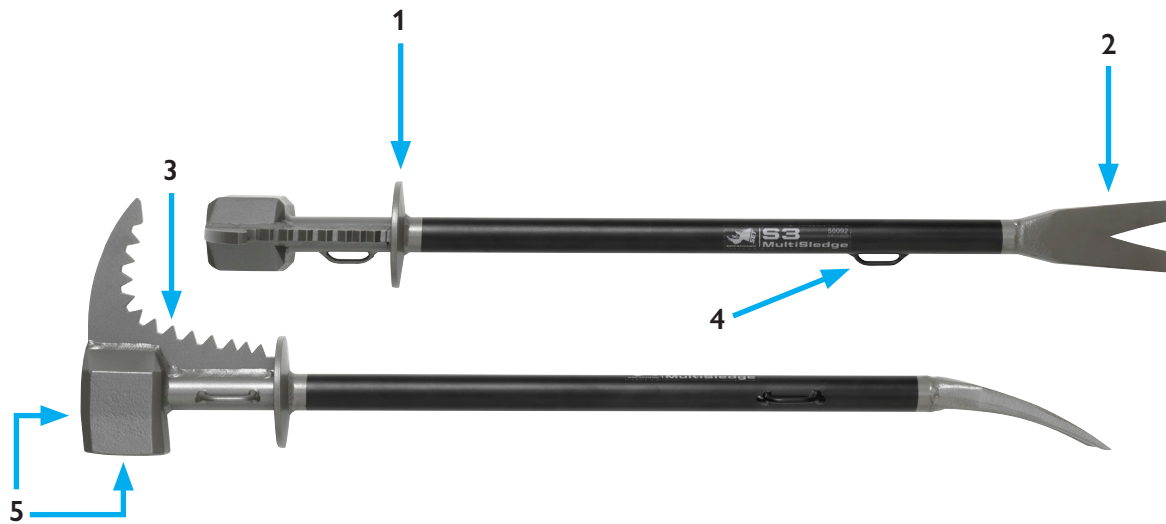

1. Hand guard
2. Forked prybar head
3. Break'n rake with saw function
4. Welded sling attachments
5. Hammer head in two directions

Strength test of S3 MultiSledge

Primary purpose of this test is to ensure quality during factory production.
Second purpose of the test is to ensure there is no end user tool failure when used correctly.
Tool failure can lead to operator injury or compromise the operation in some way.

TEST 1

415 kg pressure 350 mm from the head.
The flexibility at 415 kg is 20 mm.



After releasing the pressure, the tubing returns back to normal position without any damages.



300 kg+ pressure on the claw end.
The flexibility at 300 kg is 100 mm.



After releasing the pressure, the tubing returns back to normal position without any damages.



MOE-077 V-tac 2 Sling Point




Product information

Prod Nr	MOE-077
Prod Name	V-tac 2 Sling Point



Värmebehandlingsintyg

Provdatum:	2020-10-19	Härddjup Krav:	
Arbetsordernummer:	547538	Ythårdhet Krav:	
Charge:		Ythårdhet:	Huvud=Ca 50 HRC Spets=Ca 54 HRC
Kund:	Sweden Entry Tools AB	Kärnhårdhet Krav:	
Kunds order nr:	2020-10-13	Kärnhårdhet:	
Kundens ref:	Lars Ingesson	Korngränsoxider:	
Vår ref:		Restaustenit:	
Material:		Operatör:	Stefan Bengtsson
Benämning:	Multisledge S3	Godkänd:	
Detalj nr:			
Övrigt:			

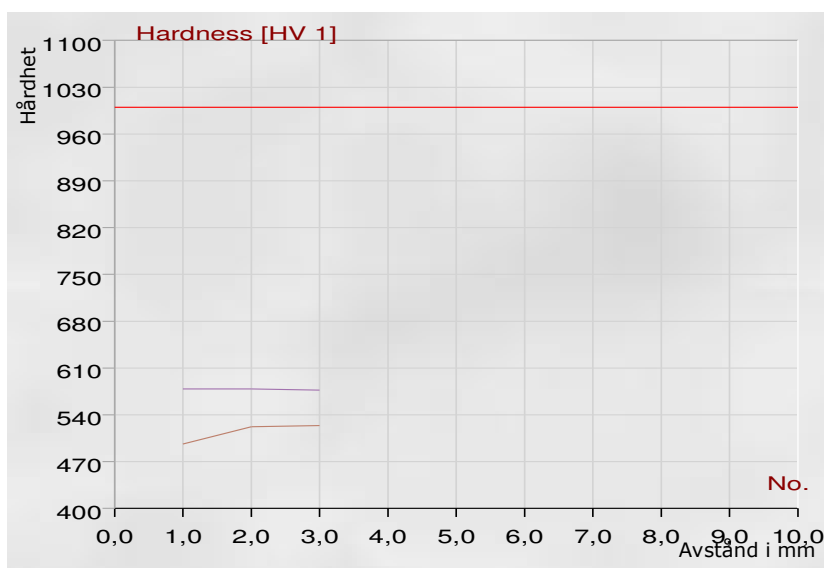

	Position	Testmetod	Härddjup@	DC/DI	1:a intryck
	1.) Huvud	HV 1	550	0,00	497
	2.) Spets	HV 1	550	0,00	579

R = Ommänt värde

Datum: 19.10.2020

Signatur: _____