





- Multi-function pry bar effective against all types of In and Out Going Doors.
- Traction Teeth minimize slippage and maximize displacement.
- Wedge shaped head for maximum separation of door and frame.
- Forked prybar end for high leverage prying.
- Made of high-strength, lightweight hydraulic pipe steel.
- Full Hardened Swedish Steel Heads 52-HRC Hardness Rockwell C-Scale.
- Sling attachment points are provided to ensure easy carriage.
- Clear painted head.
- Rust protected paint.
- Grip-friendly structure for optimal grip.

Product information	
Prod Nr	MOE-014
Prod Name	P7 Multipry
HS code	8205598000
Nato stock nr	
Mateial	Steel
Color	Black

Product dimension	
Length	700 mm (28")
Weight	2.3 kg
Package dimension	
Length	740 mm
Width	140 mm
Height	110 mm
Weight	2.7 kg

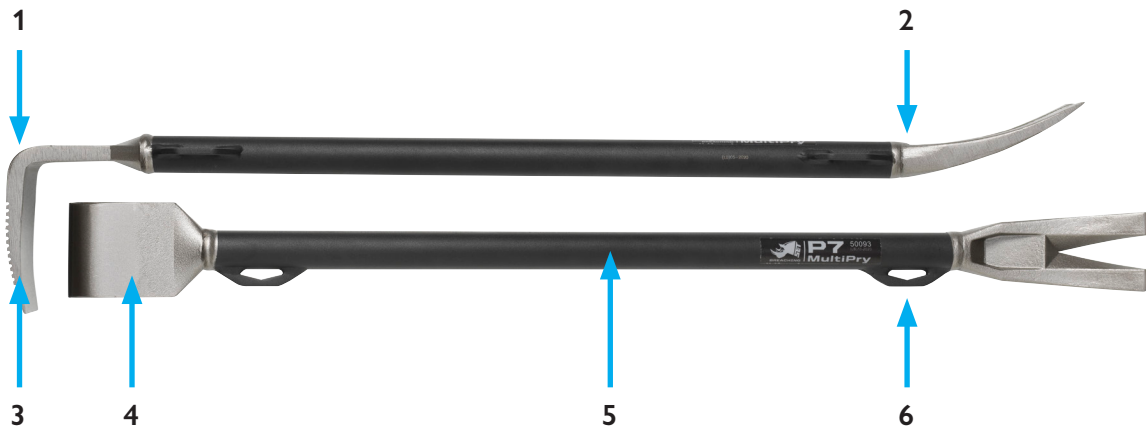

1. Very strong Pryhead
2. Slim designed Clawhead
3. Wedge shaped head with milled grooves
4. Large impact plate
5. 25 mm tube
6. Welded sling attachments 25x5 mm

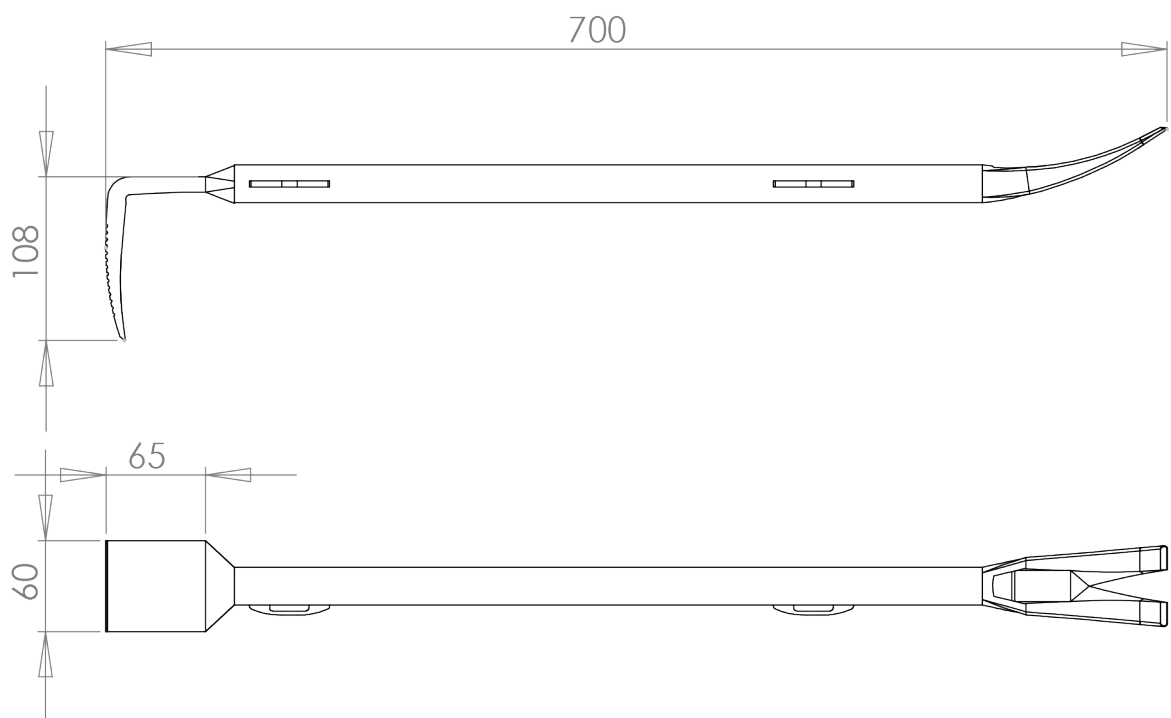

Strength test of P7 Multipry

Primary purpose of this test is to ensure quality during factory production.
 Second purpose of the test is to ensure there is no end user tool failure when used correctly.
 Tool failure can lead to operator injury or compromise the operation in some way.

TEST 1

335 kg+ pressure at the normal point when working with the tool.
 The flexibility at 335 kg is 90 mm.
 This means the tool will never break when used correctly.



After releasing the pressure, the tubing returns back to normal position without any damages.



TEST 2

562 kg+ pressure 30 cm from the head when working with the tool.
 The flexibility is 40 mm. This means the tool will never break when used correctly.



After releasing the pressure, the tubing returns back to normal position without any damages.



Strength test of P7 Multipry

TEST 3 VERTICAL ANGLE

400 kg+ pressure at the normal point when working with the tool.
The flexibility at 406 kg is 65 mm.
This means the tool will never break when used correctly.

After releasing the pressure, the tubing returns back to normal position without any damages.



MOE-077 V-tac 2 Sling Point**Product information**

Prod Nr	MOE-077
Prod Name	V-tac 2 Sling Point


MOE-083 Multipry Carrier**Product information**

Prod Nr	MOE-083
Prod Name	Multipry Carrier



Värmebehandlingsintyg

Provdatum:	2020-10-19	Härddjup Krav:	
Arbetsordernummer:	538720	Ythårdhet Krav:	
Charge:		Ythårdhet:	P=Ca 51 HRC R=Ca 48 HRC S=Ca 52 HRC
Kund:	Sweden Entry Tools AB	Kärnhårdhet Krav:	
Kunds order nr:	2020-08-10	Kärnhårdhet:	
Kundens ref:	Lars Ingesson	Korngränsoxider:	
Vår ref:		Restaustenit:	
Material:		Operatör:	Stefan Bengtsson
Benämning:	Multipry P7	Godkänd:	
Detalj nr:			
Övrigt:			

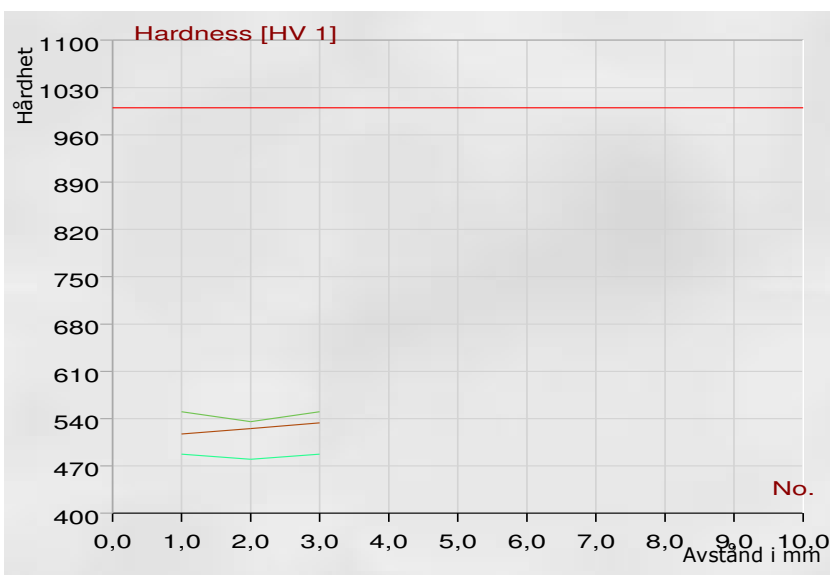

	Position	Testmetod	Härddjup@	DC/DI	1:a intryck
	1.) Plan yta	HV 1	550	0,00	517
	2.) Rör	HV 1	550	0,00	488R
	3.) Spets	HV 1	550	0,00	550

R = Ommäkt värde

Datum: 19.10.2020

Signatur: _____